


ITEM TECHNICAL CARD



T - head width (mm)	10,0
L1 - shank length (mm)	11,5
L2 - shank length after fixing (mm)	5,0
L - rivet nuts lenght (mm)	15,0
k - head thickness (mm)	1,0
grip range (mm)	2,5 ÷ 4,0
axial proof load for thread (N)	10000
max clamping torque (Nm)	10
d - rivet nut pitch	M6
hole diameter	7,8
body material	steel
head type	dome
shank type	knurled cylindrical

DESCRIZIONE \ DESCRIPTION: RIVBOLT-BFTCZ Ins FE maschio zigr f.6,6 ss2,0-3,8 M6x15				CATEGORIA \ CATEGORY: 5394000.00250	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	

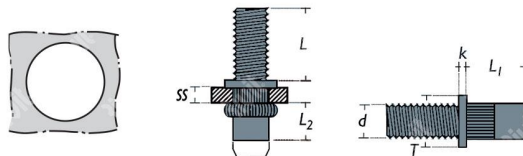

**FASTENERS
& TOOLS**
RIVIT.IT