


ITEM TECHNICAL CARD



T - head width (mm)	8,0
L1 - shank length (mm)	9,0
L2 - shank length after fixing (mm)	3,5
L - rivet nuts lenght (mm)	10,0
k - head thickness (mm)	0,5
grip range (mm)	2,0 ÷ 3,0
axial proof load for thread (N)	4000
max clamping torque (Nm)	4
d - rivet nut pitch	M4
hole diameter	5,5
body material	steel
head type	dome
shank type	knurled cylindrical

DESCRIZIONE \ DESCRIPTION: RIVBOLTBFTCZ-Male Rivet nut Steel h.5,5 ss2,0-3,0 Knurled M4x10		CATEGORIA \ CATEGORY: 5477500.08000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: 1 OF 1	CARTIGLIO \ FORMAT Mod.P023_07
		FORMATO FOGLIO: SHEET FORMAT: A4	

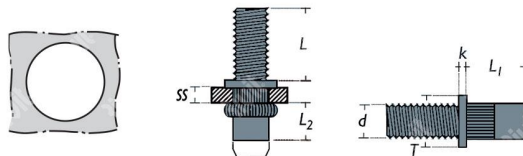

**FASTENERS
& TOOLS**
RIVIT.IT