


ITEM TECHNICAL CARD



T - head width (mm)	10,0
L1 - shank length (mm)	10,0
L2 - shank length after fixing (mm)	5,0
L - rivet nuts lenght (mm)	10,0
k - head thickness (mm)	1,0
grip range (mm)	0,5 ÷ 2,5
axial proof load for thread (N)	10000
max clamping torque (Nm)	10
d - rivet nut pitch	M6
hole diameter	7,8
body material	steel
head type	dome
shank type	knurled cylindrical

DESCRIZIONE \ DESCRIPTION: RIVBOLT-BFTCZ Bl.rivet nut flat head h.7,8 grip knurled grip 0.5-2,5		CATEGORIA \ CATEGORY: 5543800.04000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: 1 OF 1	
		FORMATO FOGLIO: SHEET FORMAT: A4	
		CARTIGLIO \ FORMAT Mod.P023_07	

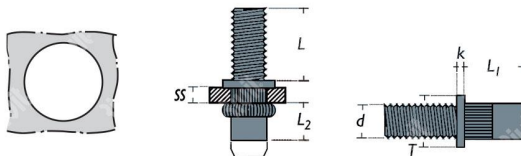

**FASTENERS
& TOOLS**
RIVIT.IT