


ITEM TECHNICAL CARD



T - head width (mm)	10,0
L1 - shank length (mm)	10,0
L2 - shank length after fixing (mm)	5,0
L - rivet nuts lenght (mm)	15,0
k - head thickness (mm)	1,0
grip range (mm)	0,5 ÷ 2,5
axial proof load for thread (N)	10000
max clamping torque (Nm)	10
d - rivet nut pitch	M6
hole diameter	7,8
body material	steel
head type	dome
shank type	knurled cylindrical

DESCRIZIONE \ DESCRIPTION: RIVBOLT-BFTC-Blind rivet nut flat head h.7,8 grip 0,5-2,5 mm Knurled		CATEGORIA \ CATEGORY: 5671500.00250	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	
ESEGUITO DA \ DRAWN BY: RIVIT		NOTE \ NOTES:	
DATA:		TRATT. SUPERFICIALE \ SURF. TREATMENT:	
CONTROLLATO DA \ CHECKED BY: RIVIT		Rugosità superficiale generale: General surface roughness:	
DATA:		PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	
APPROVATO DA \ APPROVED BY: RIVIT		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
DUREZZA \ HARDNESS:		FOGGLIO \ SHEET: 1 OF 1 FORMATO FOGGLIO: A4 SHEET FORMAT:	
PESO \ WEIGHT:		Scale \ SCALE: CARTIGLIO \ FORMAT Mod.P023_07	
		METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:	

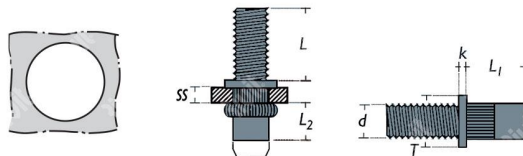

FASTENERS & TOOLS
RIVIT.IT