


ITEM TECHNICAL CARD



hole diameter (mm)	6,6/6,8
d - rivet diameter	6,4
T - head width (mm)	10
L - rivet length (mm)	25,5
L1 (mm)	29,5
k - head thickness (mm)	2
shear strength (N)	5000
tensile strength (N)	3500
grip range (mm)	17,8 ÷ 19,8
body material	aluminium
mandrel material	aluminium
head type	countersunk

DESCRIZIONE \ DESCRIPTION: <b>LOCKRIV-Rivetto Alluminio/Alluminio TS ss17,8-19,8 6,4x25,5</b>		CATEGORIA \ CATEGORY: <b>5729400</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: <b>Mod.P023_07</b>

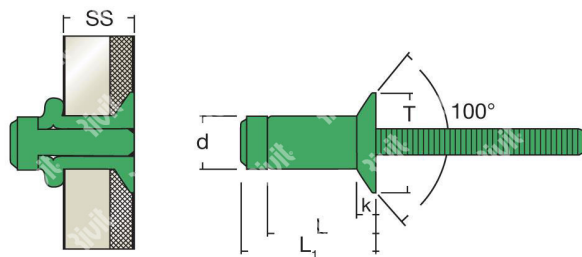

**FASTENERS & TOOLS**  
RIVIT.IT