


ITEM TECHNICAL CARD



hole diameter (mm)	6,6/6,8
d - rivet diameter	6,4
T - head width (mm)	10
L - rivet length (mm)	29,5
L1 (mm)	33,5
k - head thickness (mm)	2
shear strength (N)	5000
tensile strength (N)	3500
grip range (mm)	21,8 ÷ 23,8
body material	aluminium
mandrel material	aluminium
head type	countersunk

DESCRIZIONE \ DESCRIPTION: LOCKRIV-Rivetto Alluminio/Alluminio TS ss21,8-23,8 6,4x29,5		CATEGORIA \ CATEGORY: 5729600	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	Scale \ SCALE: Mod.P023_07

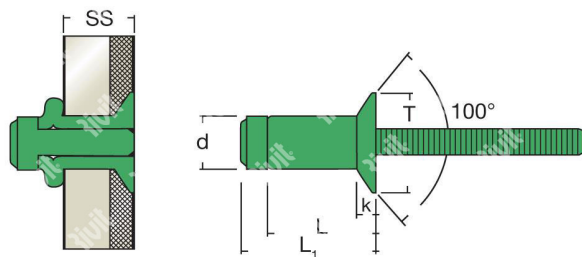

FASTENERS & TOOLS
RIVIT.IT