



ITEM TECHNICAL CARD

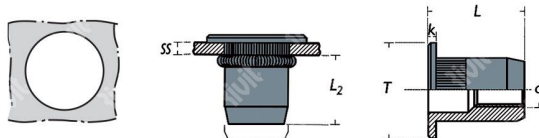

T - head width (mm)	18,0
L2 - shank length after fixing (mm)	7,6 ÷ 8,2
L - rivet nuts length (mm)	23,0
k - head thickness (mm)	1,5
grip range (mm)	3,0 ÷ 6,0
d - rivet nut pitch	M6
hole diameter	9,0
body material	steel
head type	large
shank type	open knurled cylindrical

DESCRIZIONE \ DESCRIPTION: FLC-Z-Rivsert Fe TL18 f.9,0 ss3,0-6,0 Zig.ZnNi M6/060			CATEGORIA \ CATEGORY: 5878500.03000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07
				METODO 1 (ISO 128) METHOD 1 (ISO 128)
				REVISIONE: REVISION:
				 FASTENERS & TOOLS RIVIT.IT