


ITEM TECHNICAL CARD



hole diameter (mm)	2,36 ÷ 2,44
d - rivet diameter	2,4
model	BRAT24096
T - head width (mm)	4,0
L - rivet length (mm)	9,6
number of pieces in cartridge (pz)	28
k - head thickness (mm)	1,0
shear strength (N)	250,0
tensile strength (N)	400,0
grip range (mm)	6,7 ÷ 8,0
body material	aluminium
head type	dome

DESCRIZIONE \ DESCRIPTION: <b>BRAT-Speedriv Alu in cartridge 28pcs gr.6,7-8,0 2,4x9,6</b>				CATEGORIA \ CATEGORY: <b>5940800.16000</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>		
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: <b>1 OF 1</b>	FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>	

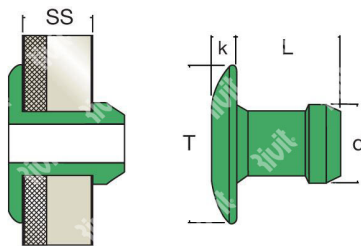

**FASTENERS  
& TOOLS**  
RIVIT.IT