


ITEM TECHNICAL CARD



diamètre du trou (mm)	4,5 - 4,8
diamètre (mm)	M3
modèle	RSCTO030
L - longueur (mm)	6
profondeur minimale du trou (mm)	8,0
A x h (mm)	5,0 x 0,5
a x h (mm)	3,0 x 0,5

DESCRIZIONE \ DESCRIPTION: RSCT-O-Douille auto-sertissable en laiton t.4,5-4,8 - de.5,0 - h.6,0		CATEGORIA \ CATEGORY: 0344600.01000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	CARTIGLIO \ FORMAT Mod.P023_07

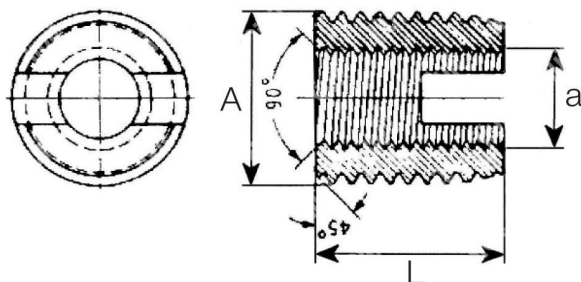

**FASTENERS
& TOOLS**
RIVIT.IT