


ITEM TECHNICAL CARD



diamètre du trou (mm)	5,8 - 6,2
diamètre (mm)	M4
modèle	RSCTO040
L - longueur (mm)	8
profondeur minimale du trou (mm)	10,0
A x h (mm)	6,5 x 0,75
a x h (mm)	4,0 x 0,7

DESCRIZIONE \ DESCRIPTION: RSCT-O-Douille auto-sertissable en laiton t.5,8-6,2 - de.6,5 - h .8,0		CATEGORIA \ CATEGORY: 0344700.05000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	CARTIGLIO \ FORMAT Mod.P023_07
		FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4
		Scale \ SCALE:	

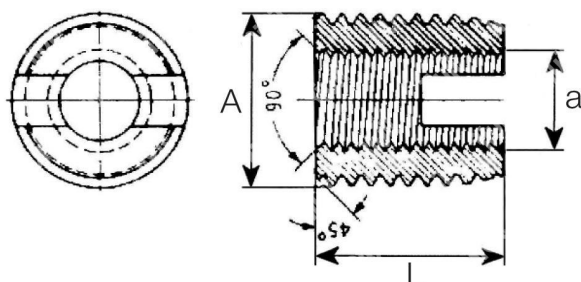

**FASTENERS
& TOOLS**
RIVIT.IT