


ITEM TECHNICAL CARD



longueur (mm)	38,0
Matière	acier galvanisé blanc C15
Diamètre	3,9
pas	1,3
UNI	8119
DIN	7504P
ISO	15482
k (mm)	2,3
Description Normative	vis autoperc. à tête cylind. a/empreinte croisée Ph
d1 (mm)	7,5
PH	2

DESCRIZIONE \ DESCRIPTION: Csk flat head self drilling screw UNI8119/DIN7504P white zinc plated		CATEGORIA \ CATEGORY: 05868ZB.00500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		FOGLIO \ SHEET: 1 OF 1	REVISIONE: REVISION:
		PESO \ WEIGHT:	CARTIGLIO \ FORMAT Mod.P023_07
		Scale \ SCALE:	

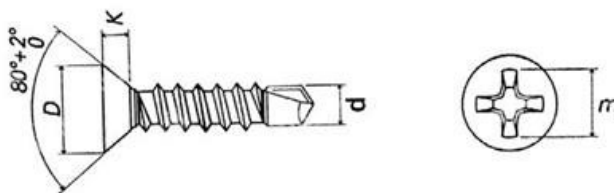

**FASTENERS
& TOOLS**
RIVIT.IT