


ITEM TECHNICAL CARD



| | |
|-----------------------|--|
| longueur (mm) | 19,0 |
| Diamètre | 4,8 |
| pas | 1,6 |
| UNI | 6950 |
| DIN | 3928 |
| k (mm) | 3,25 |
| S (mm) | 8,0 |
| b (mm) | 0,9 |
| Description Normative | vis autotaraudeuses à tête hexagonale et à chant |
| e min (mm) | 8,71 |
| d1 min (mm) | 9,8 |
| d1 max (mm) | 10,5 |

| | | | |
|--|-------|--|---|
| DESCRIZIONE \ DESCRIPTION: Vis autotaraudeuse UNI6950 à tête hexagonale bridé acier zingué | | CATEGORIA \ CATEGORY: 11641ZB.00500 | |
| MATERIAL \ MATERIAL: | | TRATTAMENTO TERMICO \ HEAT TREATMENT: | NOTE \ NOTES: |
| ESEGUITO DA \ DRAWN BY: RIVIT | DATA: | TRATT. SUPERFICIALE \ SURF. TREATMENT: | Rugosità superficiale generale: General surface roughness: |
| CONTROLLATO DA \ CHECKED BY: RIVIT | DATA: | PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]: | NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW |
| APPROVATO DA \ APPROVED BY: RIVIT | DATA: | DUREZZA \ HARDNESS: | METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION: |
| | | PESO \ WEIGHT: | Scale \ SCALE: Mod.P023_07 |

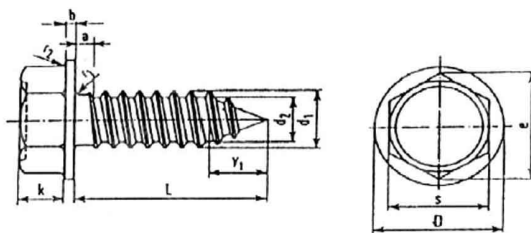

**FASTENERS
& TOOLS**
RIVIT.IT