


ITEM TECHNICAL CARD



diamètre du trou (mm)	6,0 - 6,2
diamètre (mm)	M4
modèle	RSCFFL040
L - longueur (mm)	8
profondeur minimale du trou (mm)	10,0
A x h (mm)	6,5 x 0,8
a x h (mm)	4,0 x 0,7

DESCRIZIONE \ DESCRIPTION: RSCF-F-Douille auto-sertissable Ac galv a/trou f10 M4x0,7x8 - 0318L		CATEGORIA \ CATEGORY: 2791000	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: 1 OF 1	
		FORMATO FOGLIO: SHEET FORMAT: A4	
		CARTIGLIO \ FORMAT Mod.P023_07	

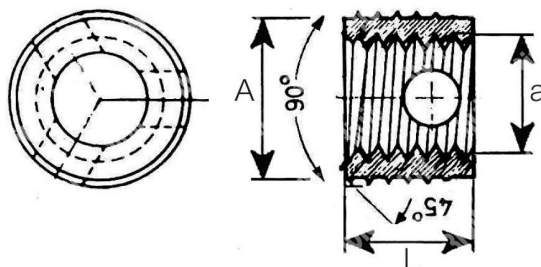

**FASTENERS
& TOOLS**
RIVIT.IT