


ITEM TECHNICAL CARD



diamètre du trou (mm)	7,4 - 7,7
diamètre (mm)	M5
modèle	RSCFFL050
L - longueur (mm)	10
profondeur minimale du trou (mm)	13,0
A x h (mm)	8,0 x 1,0
a x h (mm)	5,0 x 0,8

DESCRIZIONE \ DESCRIPTION: RSCF-F-Douille auto-sertissable Ac galv a/trou f13 M5x0,8x10 -		CATEGORIA \ CATEGORY: 2791100	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) REVISIONE: METHOD 1 (ISO 128) REVISION:
		PESO \ WEIGHT:	CARTIGLIO \ FORMAT Mod.P023_07
		FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4
		Scale \ SCALE:	

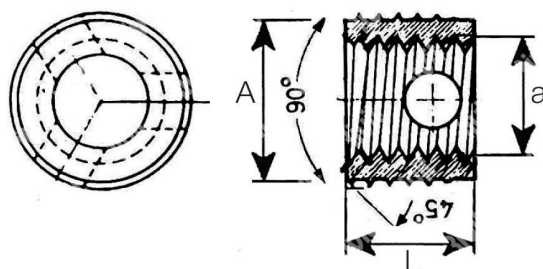

**FASTENERS
& TOOLS**
RIVIT.IT