


ITEM TECHNICAL CARD



diamètre du trou (mm)	7,4 - 7,7
diamètre (mm)	M5
modèle	RSCFFL050
L - longueur (mm)	10
profondeur minimale du trou (mm)	13,0
A x h (mm)	8,0 x 1,0
a x h (mm)	5,0 x 0,8

DESCRIZIONE \ DESCRIPTION: RSCF-F-Douille auto-sertissable Ac galv a/trou f13 M5x0,8x10 -		CATEGORIA \ CATEGORY:		2791100	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW	
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:			
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	REVISIONE: REVISION:

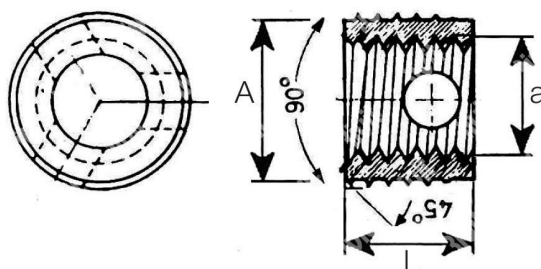

**FASTENERS
& TOOLS**
RIVIT.IT