


ITEM TECHNICAL CARD



diamètre du trou (mm)	11,1 - 11,5
diamètre (mm)	M8
modèle	RSCFFL080
L - longueur (mm)	14
profondeur minimale du trou (mm)	17,0
A x h (mm)	12,0 x 1,5
a x h (mm)	8,0 x 1,25

DESCRIZIONE \ DESCRIPTION: RSCF-F-Douille auto-sertissable Ac galv a/trou f17 M8x1,25x14 -		CATEGORIA \ CATEGORY: 2791400	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: 1 OF 1	
		FORMATO FOGLIO: SHEET FORMAT: A4	
		CARTIGLIO \ FORMAT Mod.P023_07	

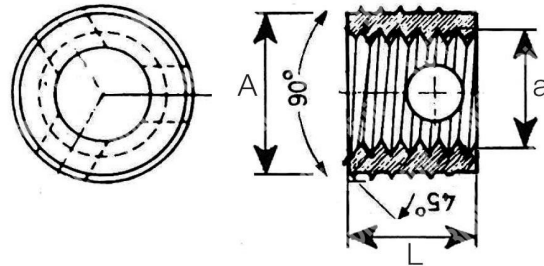

**FASTENERS
& TOOLS**
RIVIT.IT