


ITEM TECHNICAL CARD



diamètre du trou (mm)	13,1 - 13,5
diamètre (mm)	M10
modèle	RSCFFL100
L - longueur (mm)	18
profondeur minimale du trou (mm)	22,0
A x h (mm)	14,0 x 1,5
a x h (mm)	10,0 x 1,5

DESCRIZIONE \ DESCRIPTION: RSCF-F-Douille auto-sertissable Ac galv a/trou f22 M10x1,5x18				CATEGORIA \ CATEGORY: 2791600	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	

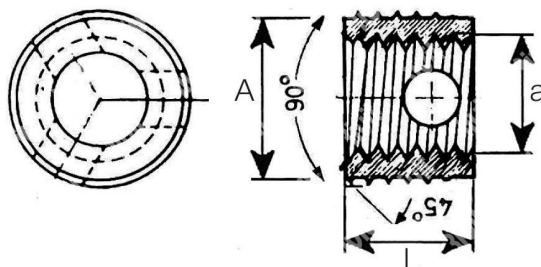

**FASTENERS
& TOOLS**
RIVIT.IT