


ITEM TECHNICAL CARD



diamètre du trou (mm)	18,6 - 19,4
diamètre (mm)	M16
modèle	RSCT160
L - longueur (mm)	22
profondeur minimale du trou (mm)	27,0
A x h (mm)	20,0 x 1,5
a x h (mm)	16,0 x 2,0

DESCRIZIONE \ DESCRIPTION: <b>RSCT-Bussola autofil. in AcciaioZin(x pressofuso) de.20x1,5 c/intagli</b>		CATEGORIA \ CATEGORY: <b>4247300.00500</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FUOGIO \ SHEET: <b>1 OF 1</b> FORMATO FOGGIO: <b>A4</b> SHEET FORMAT: <b>A4</b>
		PESO \ WEIGHT:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b> 

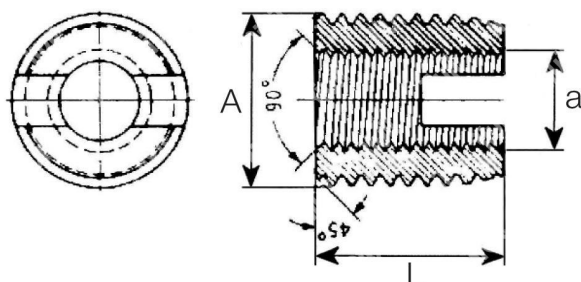

**FASTENERS  
& TOOLS**  
RIVIT.IT