


ITEM TECHNICAL CARD



diamètre du trou (mm)	14,6 - 15,4
diamètre (mm)	M12
modèle	RSCTO120
L - longueur (mm)	22
profondeur minimale du trou (mm)	26,0
A x h (mm)	16,0 x 1,5
a x h (mm)	12,0 x 1,75

DESCRIZIONE \ DESCRIPTION: <b>RSCT-O-Douille auto-sertissable en laiton t.14,8-15,2 - de.16,0 -</b>		CATEGORIA \ CATEGORY: <b>4602000</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:	NOTE \ NOTES:
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	METODO 1 (ISO 128) METHOD 1 (ISO 128)
		PESO \ WEIGHT:	REVISIONE: REVISION:
		FOGLIO \ SHEET: <b>1 OF 1</b>	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>
		FORMATO FOGLIO: SHEET FORMAT: <b>A4</b>	

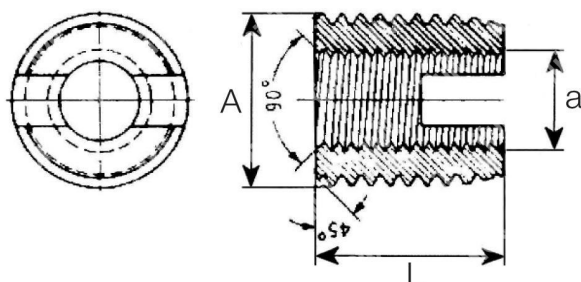

**FASTENERS  
& TOOLS**  
RIVIT.IT