


ITEM TECHNICAL CARD



consommation d'air par cycle 6 bar (lt)	4,8
course (mm)	20
force de traction à 6bar (N)	18000
pression de travail d'air (bar)	6
pression d'air min.-max. (bar)	5 - 7
poids (kg)	1,866
niveau sonore dB(A)	78,5
vibrations (m/s <sup>2</sup> )	< 2,5

DESCRIZIONE \ DESCRIPTION: <b>RIV506-Hydropneumatic tool for rivets up to d.6,4 /</b>				CATEGORIA \ CATEGORY: <b>4692100</b>	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: <b>RIVIT</b>	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:		Rugosità superficiale generale: General surface roughness:	
CONTROLLATO DA \ CHECKED BY: <b>RIVIT</b>	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) \ HEAT TREATMENT (SURF) DEPTH [mm]:		<b>NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW</b>	
APPROVATO DA \ APPROVED BY: <b>RIVIT</b>	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: <b>1 OF 1</b>	FORMATO FOGLIO \ SHEET FORMAT: <b>A4</b>	METODO 1 (ISO 128) \ REVISIONE: METHOD 1 (ISO 128) \ REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT <b>Mod.P023_07</b>	

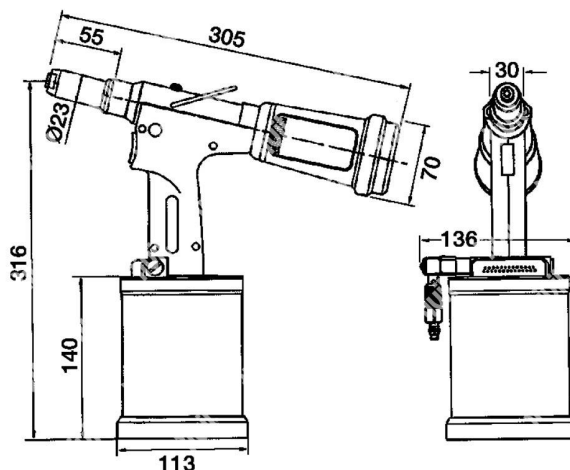

**FASTENERS & TOOLS**  
  
**RIVIT.IT**