


ITEM TECHNICAL CARD



couple (Nm)	1898
modèle	943 PC1 1/2
impulsions par minute	1200
pression de travail d'air (bar)	6,2
vibrations (m/s ²)	6,4
attaque	1/2"
vitesse sans charge (g/min)	6500
entrée d'air	1/4"
consommation d'air (l/min)	172

DESCRIZIONE \ DESCRIPTION: USAG-Magnesium Impact Wrench-The Top 943 PC1 1/2				CATEGORIA \ CATEGORY: 5634500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:	Rugosità superficiale generale: General surface roughness:		
CONTROLLATO DA \ CHECKED BY: RIVIT	DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:	NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW		
APPROVATO DA \ APPROVED BY: RIVIT	DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4	METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION:
		PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07	

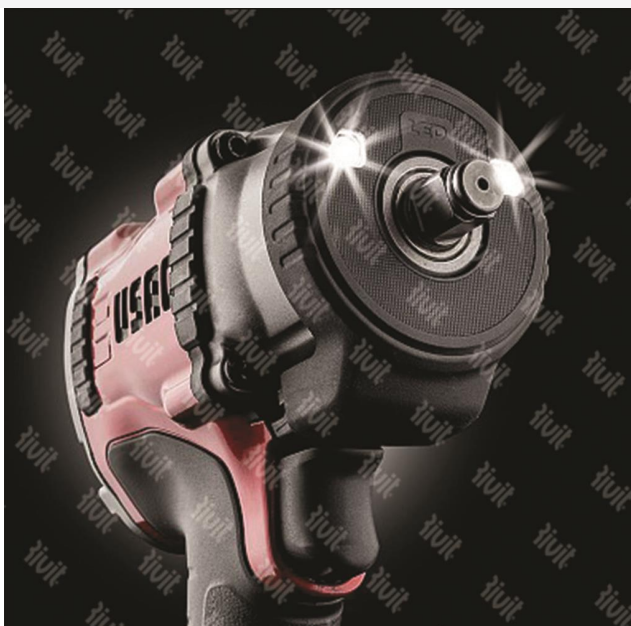

**FASTENERS
& TOOLS**
RIVIT.IT