




ITEM TECHNICAL CARD

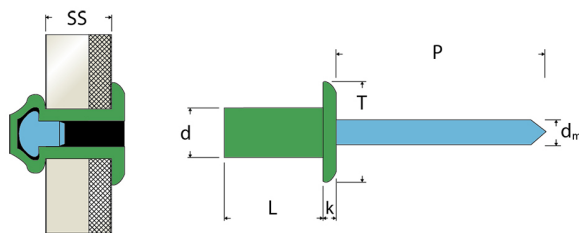

d - Body diameter (Ref.)	4,8
L - Body length (Ref.)	11,0
T - Head diameter (Ref.)	9,5
k - Head thickness (Ref.)	2,0
dm - Mandrel diameter (Ref.)	2,63
P - Mandrel protrusion (Ref.)	28
SS - Grip range (Ref.)	5,0 ÷ 6,5
Hole diameter (Ref.)	4,9
Shear load (Ref.)	2200
Tensile load (Ref.)	3100
Body material	Alulegierung
Mandrel material	Stainless A2
Standard of reference	ISO 15973:2003 (where applicable)
Type	Sealed rivet - Aluminum/stainless A2 - Round head

DESCRIZIONE \ DESCRIPTION: SAIT-Sealed blind rivet Alu/Stainless steel 420 DH /				CATEGORIA \ CATEGORY: 0087900.00500	
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:		NOTE \ NOTES:	
ESEGUITO DA \ DRAWN BY: RIVIT	DATA:	TRATT. SUPERFICIALE \ SURF. TREATMENT:			
CONTROLLATO DA \ CHECKED BY: RIVIT		DATA:	PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW
APPROVATO DA \ APPROVED BY: RIVIT		DATA:	DUREZZA \ HARDNESS:	FOGLIO \ SHEET: 1 OF 1	FORMATO FOGLIO: SHEET FORMAT: A4
			PESO \ WEIGHT:	Scale \ SCALE:	CARTIGLIO \ FORMAT Mod.P023_07
					METODO 1 (ISO 128) METHOD 1 (ISO 128)
					REVISIONE: REVISION:
 FASTENERS & TOOLS  RIVIT.IT					