


ITEM TECHNICAL CARD



| | |
|-----------------------|-------------|
| hole diameter (mm) | 5,0 |
| d - rivet diameter | 4,8 |
| T - head width (mm) | 9,0 |
| L - rivet length (mm) | 30,0 |
| shear strength (N) | 2000 |
| tensile strength (N) | 2500 |
| grip range (mm) | 23,0 ÷ 25,0 |
| body material | aluminium |
| mandrel material | steel |
| head type | countersunk |

| | | | | | |
|---|-------|--|---|---|---|
| DESCRIZIONE \ DESCRIPTION: AFS-Blind rivet Alu/Steel CSKH9,0 4,8x30,0 | | | | CATEGORIA \ CATEGORY: 0018000.02000 | |
| MATERIAL \ MATERIAL: | | TRATTAMENTO TERMICO \ HEAT TREATMENT: | | NOTE \ NOTES: | |
| ESEGUITO DA \ DRAWN BY: RIVIT | DATA: | TRATT. SUPERFICIALE \ SURF. TREATMENT: | Rugosità superficiale generale: General surface roughness: | | |
| CONTROLLATO DA \ CHECKED BY: RIVIT | DATA: | PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]: | NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW | | |
| APPROVATO DA \ APPROVED BY: RIVIT | DATA: | DUREZZA \ HARDNESS: | FOGLIO \ SHEET: 1 OF 1 | FORMATO FOGLIO: SHEET FORMAT: A4 | METODO 1 (ISO 128) METHOD 1 (ISO 128) REVISIONE: REVISION: |
| | | PESO \ WEIGHT: | Scale \ SCALE: | CARTIGLIO \ FORMAT Mod.P023_07 | |

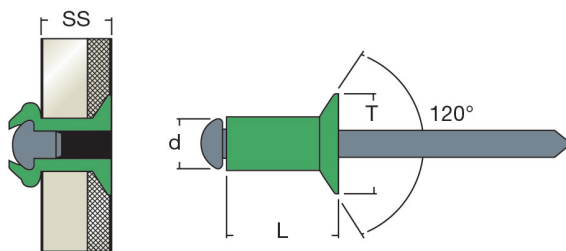

**FASTENERS
& TOOLS**
RIVIT.IT